



安规认证 Approvals



特点和优点 Features and benefits

- ❖ 安装快捷方便
Fast and easy chassis mounting
- ❖ 有不同端接方式可供选择
Various terminal connection styles
- ❖ 极好的共模和差模衰减特性，专用于逆变电源设备
Ultra-high performance of common mode and differential mode attenuation, especially for power inverter equipment

典型应用 Typical applications

- ❖ 电气和电子设备
Electrical and electronic equipment
- ❖ 医疗和数据处理设备
Medical and data processing equipment
- ❖ 应用于开关电源，抑制连续或间隙性脉冲干扰
Particularly for switching power supplies, suppressing continuous or intermittent pulse interference

技术参数 Technical specifications

额定电压 Maximum continuous operating voltage :	250VAC
工作频率 Operating frequency :	50/60Hz
额定电流 Rated currents :	1A ~ 30A @ 40°C Max.
耐压试验(一分钟) High potential test voltage(1 min) :	Line to Line 1500VDC / Line to Ground 1500VAC
工作和储存环境温度 Operation and storage temperature range :	-25°C~+85°C (25/085/21)

型号 Filter	额定电流 Rated current @40°C [A]	泄露电流 * Leakage rate * 250VAC/50Hz [mA]	电容 Capacitance Cy [nF]	电阻 Resistance R [kΩ]	端接方式 Terminal connections	电路图 Electrical schematic [fig.]	外形尺寸 Dimensions [fig.]
AS2101-1-33	1	< 0.5	3.3	1500	- 33	1	1
AS2101-2-33	2	< 0.5	3.3	1000	- 33	1	2
AS2101-3-33	3	< 0.5	4.7	1500	- 33	1	2
AS2101-6-33	6	< 0.5	4.7	1500	- 33	1	2
AS2101-10-55	10	< 0.5	4.7	1000	- 55	1	3
AS2101-12-55	12	< 1.0	6.8	1000	- 55	1	3
AS2101-16-55	16	< 1.0	6.8	1000	- 55	1	3
AS2101-20-55	20	< 1.5	10.0	1000	- 55	1	3
AS2101-30-55	30	< 1.5	10.0	1000	- 55	1	3

* 最大泄漏电流是在正常状态下测得，注意如果中线断开，最坏情况下泄露电流可能达到两倍以上。
Maximum leakage under normal operating conditions, note: if the neutral line is interrupted, worst case leakage could reach twice this level.

电路图 Electrical schematics


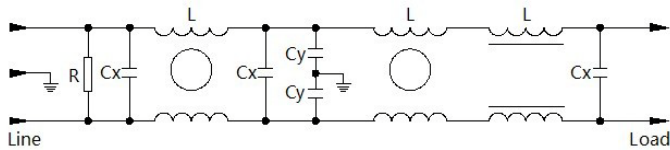


fig. 1


典型衰减特征 Typical filter attenuation

Per CISPR 17/50Ω system [——— 共模 Common mode ; - - - - - 差模 Differential mode]


AS2101 - 1 - 33




AS2101 - 2 - 33




AS2101 - 3 - 33




AS2101 - 6 - 33




AS2101 - 10 - 55




AS2101 - 12 - 55




AS2101 - 16 - 55



AS2101 - 20 - 55



AS2101 - 30 - 55



外形尺寸 Dimensions [All dimensions in mm]

端接方式 Connections style “- 33”

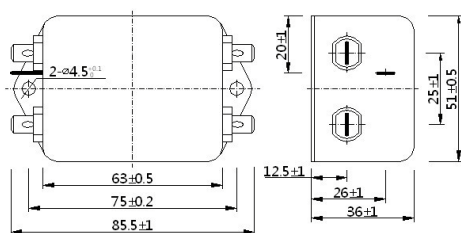


fig. 1

端接方式 Connections style “- 33”

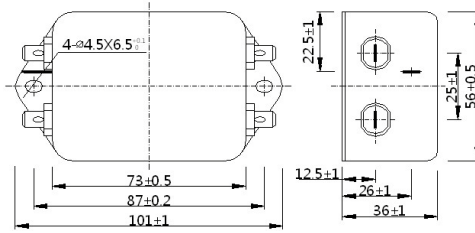


fig. 2

端接方式 Connections style “- 55”

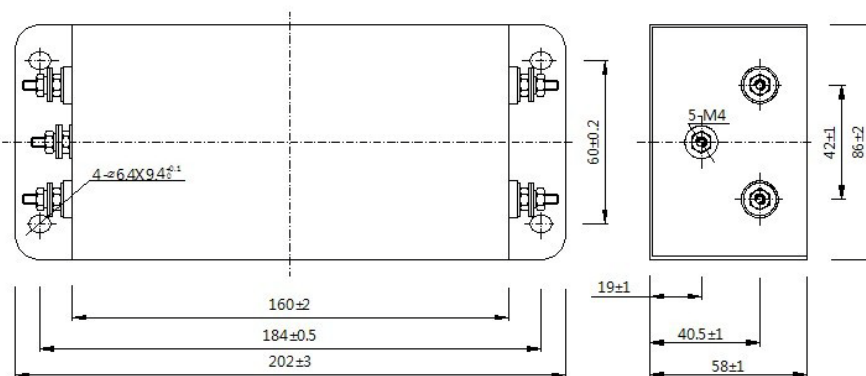


fig. 3